


Wiring Diagram for Pickup Models:

SJM-1 Vintage for Jazzmaster® SJM-2 Hot for Jazzmaster® SJM-3 Quarter Pound<sup>TM</sup> for Jazzmaster®

5427 hollister avenue, santa barbara, ca 93111 tel 805.964.9610 fax 805.964.9749 www.seymourduncan.com Congratulations on your purchase of a fine, hand-built, Seymour Duncan electric guitar pickup! Installing this pickup in your guitar isn't rocket science. And, if you're already handy with tools, it'll be a snap for you—and fun too! But if you have no experience handling red-hot soldering irons, you'd be well advised to take your new pickup and your trusty guitar to a qualified guitar tech.

## The basic steps for installation include:

- 1. Remove the strings from your guitar.
- 2. Unscrew and remove the pickguard and turn it over, taking care not to scratch your guitar's finish.
- De-solder the original pickup's wires and make sure to remember where they were connected.
- 4. Remove the original pickup from the pickup cavity.
- 5. If your original pickup had foam or springs attached to the bottom, pull them off and re-use them with your Seymour Duncan pickup.
- 6. Put the Seymour Duncan pickup into the pickup cavity.
- 7. Tin the wires from the Seymour Duncan pickup, and then solder them into place where the original pickup's wires were connected.
- 8. Put the pickguard back in place, taking care to tuck in loose wires.
- 9. Re-string your guitar and adjust the pickup height so that your new pickup balances with the other pickup in the guitar. The bridge pickup should be between 1/8" and 1/16" from the strings when they are pressed down at the highest fret on the neck. Then adjust the height of the neck pickup to balance well with the bridge pickup.

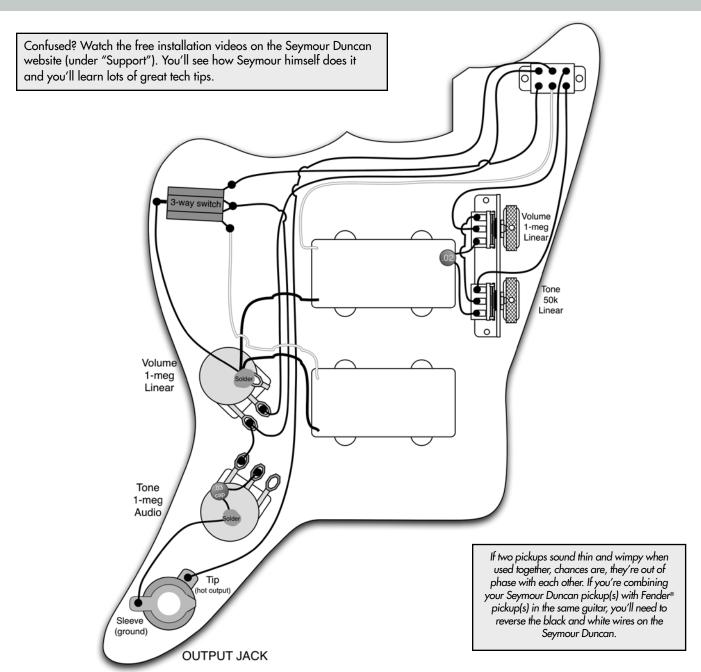



## **Wiring Diagram for Pickup Models:**


**SJAG-1** Vintage for Jaguar® SJAG-2 Hot for Jaguar® SJAG-3 Quarter Pound<sup>TM</sup> for Jaguar®

5427 hollister avenue, santa barbara, ca 93111 tel 805.964.9610 fax 805.964.9749 www.seymourduncan.com

Congratulations on your purchase of a fine, hand-built, Seymour Duncan electric guitar pickup! Installing this pickup in your guitar isn't rocket science. And, if you're already handy with tools, it'll be a snap for you—and fun too! But if you have no experience handling red-hot soldering irons, you'd be well advised to take your new pickup and your trusty guitar to a qualified guitar tech.

## The basic steps for installation include:

- 1. Remove the strings from your guitar.
- 2. Unscrew and remove the pickguard and turn it over, taking care not to scratch your guitar's finish.
- 3. De-solder the original pickup's wires and make sure to remember where they were connected.
- Remove the original pickup from the pickup cavity.
- 5. If your original pickup had foam or springs attached to the bottom, pull them off and re-use them with your Seymour Duncan pickup.
- 6. Put the Seymour Duncan pickup into the pickup cavity.
- 7. Tin the wires from the Seymour Duncan pickup, and then solder them into place where the original pickup's wires were connected.
- 8. Put the pickguard back in place, taking care to tuck in loose wires.
- 9. Re-string your guitar and adjust the pickup height so that your new pickup balances with the other pickup in the guitar. The bridge pickup should be between 1/8" and 1/16" from the strings when they are pressed down at the highest fret on the neck. Then adjust the height of the neck pickup to balance its output with the bridge pickup.

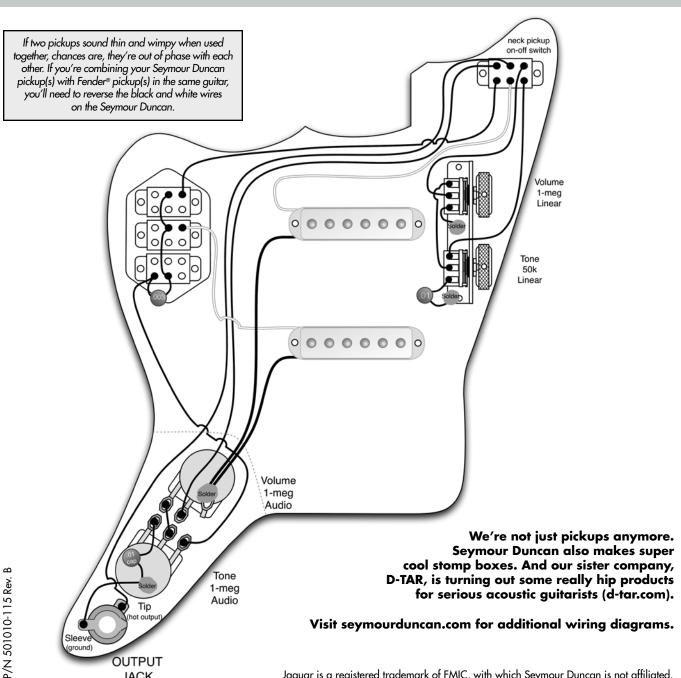

**JACK**